

# QR500

## Low Loss

**Features:**

- \* Low Insertion Loss
- \* High Weatherability
- \* UV Resistant

**Applications:**

- \* Wireless Communication
- \* Microwave Interconnect

**Electrical**

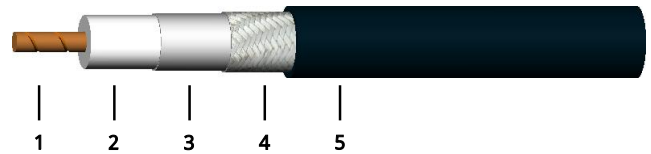
Frequency:	DC~5.8GHz
Cut-off Frequency:	41GHz
Impedance:	50Ω
Velocity of Propagation:	80%
Shielding Effectiveness:	90dB min.
Voltage Withstand:	1000V DC

**Mechanical**

Bend Radius (installation):	12.0mm
Bend Radius (repeated):	50.0mm
Weight:	30g/m

**Environmental**

Temperature:	-40~+85°C
Outdoor Life:	20 or 10 years

**Construction**


No.	Name	Size (mm)	Material
1	Inner Conductor	0.94	Copper
2	Dielectric	2.79	Foam PE
3	Outer Conductor	2.95	Double-edged aluminum foil
4	Outer Shield	3.53	Tin-plated copper braid
5	Jacket	5.00	PE or PVC

**Attenuation & Power Handling**

	0.03	0.05	0.15	0.22	0.45	0.9	1.5	1.8	2	2.5	5.8
Frequency (GHz)											
Attenuation*1 (dB/100m)	6.5	8.4	14.7	17.8	25.7	36.7	47.9	52.8	55.8	62.8	98.6
Average Power*2 (W)	890	680	390	320	220	160	120	110	100	90	60

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) =  $1.1778215 * \sqrt{F} \text{ (MHz)} + 0.0015420 * F \text{ (MHz)}$

Calculate Connector Attenuation: Attenuation (dB) =  $0.03 * \sqrt{F} \text{ (GHz)}$

**How To Order**
**QR500-X-Y-Z**

X: Frequency in GHz

Y: Connector type

Z: Length in meters

**Examples:**

To order a QR500 cable assembly, DC-5.8GHz, SMA male to SMA female, 1.5 meters, specify QR500-5.8-SSF-1.5.

**Connector naming rules:**

S - SMA (6GHz, VSWR 1.25)

N - N (6GHz, VSWR 1.25)

X - MMCX (6GHz, VSWR 1.25)

M - MCX (6GHz, VSWR 1.25)

B - BNC (4Hz, VSWR 1.4)

D - SMB (4GHz, VSWR 1.2)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)