

COMPACT POWER RELAY

1 POLE—20A

(For Automotive Applications)

FBR-53 SERIES

■ FEATURES

- Compact for high density packaging
- High contact capability (40A continuous)
- High temperature grade (-40°C to 125°C)
- Contact arrangement Form U (form A)

■ ORDERING INFORMATION

[Example] $\frac{\text{FBR53}}{\text{(a)}} \frac{\text{ND012}}{\text{(b)}} - \frac{\text{Y}}{\text{(c)}} \frac{\text{Y}}{\text{(d)}}$

(a)	Series Name	FBR-53	: FBR-53 Series
(b)	Contact Arrangement	ND	: Form U
(c)	Nominal Voltage	09	: 9 VDC
		10	: 10 VDC
		12	: 12 VDC
(d)	Contact Material	Y	: Silver Tin Oxide



Note: The part number on the relay cover does not include 'FBR'

Example: Ordering part number: FBR-53ND12-Y
 Stamped part number: 53ND12-Y

■ COIL DATA CHART

Model	Nominal Voltage	Coil Resistance (±10% at 20° C)	Must Operate Voltage
FBR53ND09-Y	9 VDC	135 Ω	5.4 VDC (at 20° C) 6.8 VDC (at 85° C)
FBR53ND10-Y	10 VDC	180 Ω	6.3 VDC (at 20° C) 7.9 VDC (at 85° C)
FBR53ND12-Y	12VDC	240 Ω	7.3 VDC (at 20° C) 9.2 VDC (at 85° C)

FBR-53 SERIES

■ SPECIFICATIONS


Item		Specification	
Contact	Arrangement	Form U (Form A)	
	Material	Silver Tin Oxide	
	Contact rating	DC 14V, 20A (resistive load)	
	Maximum Carrying Current	40 A/ continuous	
	Maximum Inrush Current	60 A	
	Contact Resistance	Average 1.5mΩ at 7A, 12 VDC	
Coil	Coil Power Consumption	Approximately 0.6 W (at rated coil voltage)	
	Operating Temperature Range	-40° C to +125° C (no frost)	
	Storage Temperature Range	-40° C to +125° C (no frost)	
	Operating Humidity	45 to 85%RH	
Insulation	Initial resistance	100MΩ maximum at 500VDC, (at 20° C, 65%RH)	
	Dielectric withstanding voltage between coil and contacts	500 VAC 50/60 Hz 1 minute, (at 20° C, 65%RH)	
Time	Operate (at nominal voltage)	10 ms maximum	
	Release (at nominal voltage)	5 ms maximum	
Life	Mechanical	10x10 ⁶ operations minimum (with no load for contact)	
	Electrical	1x10 ⁵ operations minimum (14VDC 20A resistive load)	
Other	Vibration resistance	Misoperation	10-55Hz, 1.5mm dual amplitude, direction X, Y, Z
		Endurance	10 to 100Hz, 1.5mm dual amplitude, direction X, Y, Z. Not be damaged (mechanical and technical) after test. Coil energizing: 1 hr in each direction, Coil non-energizing: 1 hr in each direction
	Shock resistance	Misoperation	100 m/s ² (11ms), direction X, Y, Z
		Endurance	1000 m/s ² (11ms), direction X, Y, Z, each 6 times Not be damaged (mechanical and technical) after test. Coil energizing: 3 times; Coil non-energizing: 3 times, total 36 times.
	Terminal	Solderability	at 270±10° C for 3±0.5sec. (terminals must be soldered)
		Strength	Pulling a terminal in its longitudinal direction for 10 sec. at 9.8N (1 Kgf)
	Weight	Approximately 6 grams	

*This is the standard value of the minimum load level. This value may differ depending on the switching frequency, environmental conditions and target reliability standard. We recommend to check this value by an actual load prior to use.


FBR-53 SERIES

■ DIMENSIONS


• Dimensions

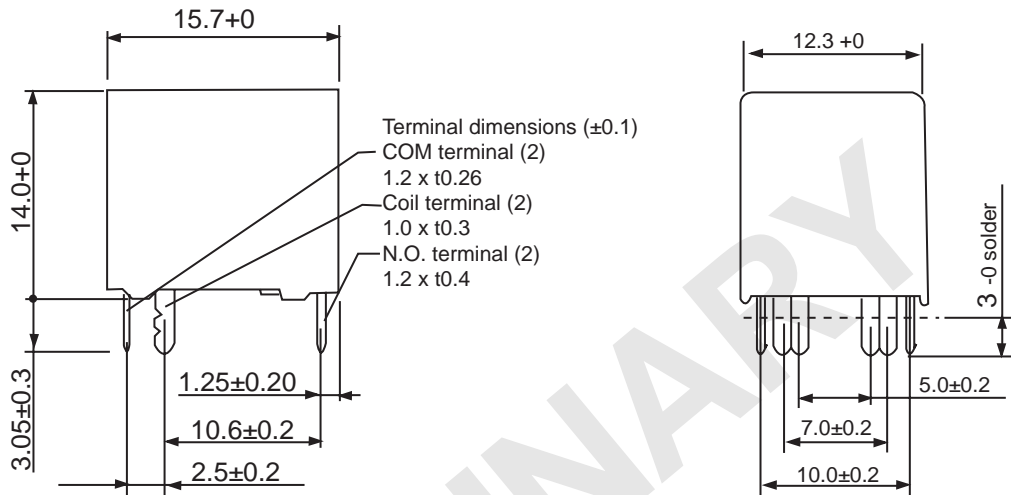

• Schematic (bottom view)



• Mounting hole layout (bottom view)

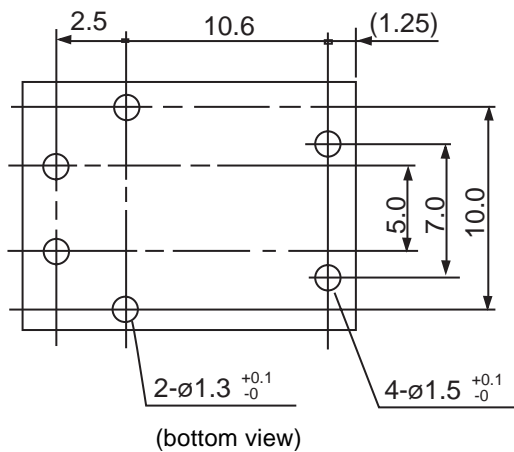

Unit: mm

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

© 2002 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 10/2002

PRELIMINARY