

QR600

Low Loss

Features:

- * Low Insertion Loss
- * High Weatherability
- * UV Resistant

Applications:

- * Wireless Communication
- * Microwave Interconnect

Electrical

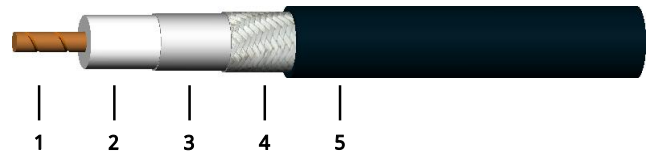
Frequency:	DC~5.8GHz
Cut-off Frequency:	30GHz
Impedance:	50Ω
Velocity of Propagation:	83%
Shielding Effectiveness:	90dB min.
Voltage Withstand:	1500V DC

Mechanical

Bend Radius (installation):	20.0mm
Bend Radius (repeated):	65.0mm
Weight:	50g/m

Environmental

Temperature:	-40~+85°C
Outdoor Life:	20 or 10 years

Construction


No.	Name	Size (mm)	Material
1	Inner Conductor	1.42	Copper
2	Dielectric	3.81	Foam PE
3	Outer Conductor	3.94	Double-edged aluminum foil
4	Outer Shield	4.52	Tin-plated copper braid
5	Jacket	6.00	PE or PVC

Attenuation & Power Handling

	0.03	0.05	0.15	0.22	0.45	0.9	1.5	1.8	2	2.5	5.8
Frequency (GHz)											
Attenuation*1 (dB/100m)	4.4	5.7	10.0	12.2	17.5	25.1	32.8	36.1	38.1	42.9	67.5
Average Power*2 (W)	1490	1150	660	540	380	260	200	180	170	150	100

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) = $0.8038058 * \sqrt{F} (\text{MHz}) + 0.0010827 * F (\text{MHz})$

Calculate Connector Attenuation: Attenuation (dB) = $0.03 * \sqrt{F} (\text{GHz})$

How To Order
QR600-X-Y-Z

X: Frequency in GHz

Y: Connector type

Z: Length in meters

Examples:

To order a QR600 cable assembly, DC-5.8GHz, SMA male to SMA female, 1.5 meters, specify QR600-5.8-SSF-1.5.

Connector naming rules:

S - SMA (6GHz, VSWR 1.25)

N - N (6GHz, VSWR 1.25)

T - TNC (6GHz, VSWR 1.25)

X - MMCX (6GHz, VSWR 1.25)

M - MCX (6GHz, VSWR 1.25)

B - BNC (4GHz, VSWR 1.4)

D - SMB (4GHz, VSWR 1.2)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)