


Multilayer Chip High Q Inductor – HQ-Q Series

Operating Temp. : -55°C~+125°C



FEATURES

- Monolithic structure for high reliability
- High self-resonant frequency
- Excellent solderability and high heat resistance
- High Q value correspond to wire wound inductor

APPLICATIONS

- RF circuit in telecommunication and other Equipments
- Mobile phones such as GSM, CDMA, TD-LTE, FDD-LTE, PDC, etc.
- Bluetooth, W-LAN

PRODUCT IDENTIFICATION

HQ

①

Type	
HQ	Chip High Q Inductor

0402

②

Q

③

External Dimensions (L×W) (mm)	
0402[01005]	0.4×0.2
0603[0201]	0.6×0.3

3N9

④

④

Nominal Inductance	
Example	Nominal Value
3N9	3.9nH
10N	10nH
※N=nH	

⑤

Inductance Tolerance	
B	±0.1nH
C	±0.2nH
S	±0.3nH
G	±2%
H	±3%
J	±5%

B

⑤

T

⑥

③

Characteristics Code	
Q	

01

⑦

⑥


Packing	
T	Tape & Reel

⑦

Serial Code	
01	

SHAPE AND DIMENSIONS

Unit: mm [inch]

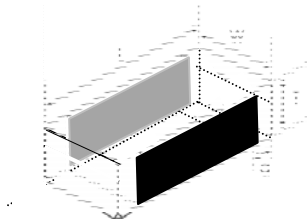

Type	L	W	T	a
0402 [01005]	0.4±0.02 [.016±.0008]	0.2±0.02 [.008±.0008]	0.3±0.02 [.118±.0008]	0.14±0.03 [.005±.0010]
0603 [0201]	0.6±0.03 [.024±.0012]	0.3±0.03 [.012±.0012]	0.4±0.02 [.016±.0008]	0.15±0.03 [.006±.0012]

SPECIFICATIONS

HQ0402Q Series

Part Number	Inductance	Min. Quality Factor	L, Q Test Freq.	Typical Q @ Freq. (GHz)					Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
				0.5	0.8	1.8	2.0	2.4			
Units	nH	-	MHz	-					MHz	Ω	mA
Symbol	L	Q	Freq.	Q					S.R.F	DCR	I _r
HQ0402Q0N4□T01	0.4	-	500	-	-	-	-	-	17000	0.03	1000
HQ0402Q0N5□T01	0.5	-	500	-	-	-	-	-	17000	0.04	1000
HQ0402Q0N6□T01	0.6	14	500	28	31	44	48	55	17000	0.05	950
HQ0402Q0N7□T01	0.7	14	500	25	29	41	44	51	15500	0.05	900
HQ0402Q0N8□T01	0.8	14	500	23	27	39	43	48	15000	0.05	900
HQ0402Q0N9□T01	0.9	14	500	21	25	37	40	45	14500	0.05	900
HQ0402Q1N0□T01	1.0	14	500	20	24	36	39	44	13000	0.05	900
HQ0402Q1N1□T01	1.1	14	500	22	26	40	42	48	13000	0.07	850
HQ0402Q1N2□T01	1.2	14	500	20	25	37	40	46	13000	0.07	800
HQ0402Q1N3□T01	1.3	14	500	21	26	39	42	48	12500	0.08	700
HQ0402Q1N4□T01	1.4	14	500	21	25	38	42	47	12500	0.08	700
HQ0402Q1N5□T01	1.5	14	500	20	25	37	40	46	10500	0.08	700
HQ0402Q1N6□T01	1.6	14	500	19	23	35	37	42	11000	0.08	700
HQ0402Q1N7□T01	1.7	14	500	20	24	37	39	44	11000	0.08	700
HQ0402Q1N8□T01	1.8	14	500	22	28	43	46	50	10000	0.08	700
HQ0402Q1N9□T01	1.9	14	500	24	30	46	50	55	10500	0.08	700
HQ0402Q2N0□T01	2.0	14	500	22	27	41	44	48	10000	0.1	700
HQ0402Q2N1□T01	2.1	14	500	24	29	45	48	54	10000	0.1	650
HQ0402Q2N2□T01	2.2	14	500	22	27	42	45	49	9500	0.2	500
HQ0402Q2N3□T01	2.3	14	500	24	30	46	50	55	10000	0.2	450
HQ0402Q2N4□T01	2.4	14	500	20	25	39	42	46	9000	0.2	450
HQ0402Q2N5□T01	2.5	14	500	19	24	39	42	46	9500	0.2	450
HQ0402Q2N6□T01	2.6	14	500	19	24	39	42	46	9500	0.2	450
HQ0402Q2N7□T01	2.7	14	500	20	25	39	41	45	9000	0.2	450
HQ0402Q2N8□T01	2.8	14	500	19	25	40	44	47	9000	0.2	450
HQ0402Q2N9□T01	2.9	14	500	19	25	40	44	47	9000	0.2	450
HQ0402Q3N0□T01	3.0	14	500	20	26	40	43	46	8500	0.2	450
HQ0402Q3N1□T01	3.1	14	500	20	25	41	43	45	8500	0.25	400
HQ0402Q3N2□T01	3.2	14	500	20	26	41	44	47	8000	0.25	400
HQ0402Q3N3□T01	3.3	14	500	20	26	42	44	48	8000	0.25	400
HQ0402Q3N4□T01	3.4	14	500	20	26	42	44	48	8000	0.3	400
HQ0402Q3N5□T01	3.5	14	500	20	26	42	44	48	8000	0.3	350
HQ0402Q3N6□T01	3.6	14	500	20	27	42	44	48	8000	0.3	350
HQ0402Q3N7□T01	3.7	14	500	19	25	41	43	49	8000	0.35	350
HQ0402Q3N8□T01	3.8	14	500	18	23	37	39	43	8000	0.35	350
HQ0402Q3N9□T01	3.9	14	500	19	24	37	39	42	7500	0.35	350
HQ0402Q4N0□T01	4.0	14	500	18	24	38	41	44	7000	0.35	350
HQ0402Q4N1□T01	4.1	14	500	19	24	38	41	44	7000	0.35	350
HQ0402Q4N2□T01	4.2	14	500	18	23	37	39	45	7000	0.35	350
HQ0402Q4N3□T01	4.3	14	500	19	24	37	39	42	7000	0.35	350
HQ0402Q4N7□T01	4.7	14	500	18	23	36	38	41	6500	0.35	350
HQ0402Q5N1□T01	5.1	14	500	18	24	36	38	41	6500	0.35	350
HQ0402Q5N6□T01	5.6	14	500	18	24	35	37	40	6000	0.4	300
HQ0402Q6N2□T01	6.2	14	500	17	22	32	34	37	6000	0.4	300
HQ0402Q6N8□T01	6.8	14	500	17	22	33	35	37	5500	0.4	300
HQ0402Q7N5□T01	7.5	14	500	17	23	34	36	38	5500	0.5	300
HQ0402Q8N2□T01	8.2	14	500	17	21	30	31	33	5000	0.5	300
HQ0402Q9N1□T01	9.1	14	500	17	22	31	32	33	5000	0.5	300
HQ0402Q10N□T01	10	14	500	17	22	32	33	34	5000	0.6	250



Specifications subject to change without notice. Please check our website for latest information. Revised 2018/04/15

SPECIFICATIONS

HQ0402Q Series

Part Number	Inductance	Min. Quality Factor	L, Q Test Freq.	Typical Q @ Freq. (GHz)					Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
				0.5	0.8	1.8	2.0	2.4			
Units	nH	-	MHz	-					MHz	Ω	mA
Symbol	L	Q	Freq.	Q					S.R.F	DCR	I _r
HQ0402Q11N□T01	11	14	500	15	20	30	31	33	4000	0.8	250
HQ0402Q12N□T01	12	14	500	17	21	30	31	32	4000	0.82	230
HQ0402Q13N□T01	13	14	500	15	20	30	31	32	4000	0.99	210
HQ0402Q15N□T01	15	12	500	17	21	29	30	30	4000	1.53	170
HQ0402Q16N□T01	16	12	500	16	20	29	30	29	4000	1.53	170
HQ0402Q18N□T01	18	12	500	17	21	29	29	29	3700	1.63	160
HQ0402Q20N□T01	20	12	500	16	19	25	24	23	3000	2.26	140
HQ0402Q22N□T01	22	12	500	16	19	25	24	22	3000	2.26	140
HQ0402Q24N□T01	24	12	500	15	18	23	21	20	2900	2.6	120
HQ0402Q27N□T01	27	12	500	15	18	22	20	17	2900	2.6	120
HQ0402Q30N□T01	30	10	500	13	16	18	19	20	2600	3.2	120
HQ0402Q33N□T01	33	10	300	13	16	20	19	20	2600	3.2	120
HQ0402Q36N□T01	36	10	300	13	15	16	15	12	2400	3.6	110
HQ0402Q39N□T01	39	10	300	13	15	16	15	10	2400	3.6	120

HQ0603Q Series

Part Number	Inductance	Min. Quality Factor	L, Q Test Freq.	Typical Q @ Freq. (GHz)					Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
				0.5	0.8	1.8	2.0	2.4			
Units	nH	-	MHz	-					MHz	Ω	mA
Symbol	L	Q	Freq.	Q					S.R.F	DCR	I _r
HQ0603Q0N6□T01	0.6	20	500	-	-	-	-	-	20000	0.04	1100
HQ0603Q0N8□T01	0.8	20	500	-	-	-	-	-	18000	0.04	1100
HQ0603Q1N0□T01	1.0	20	500	47	60	92	99	110	16000	0.04	1100
HQ0603Q1N2□T01	1.2	20	500	45	56	88	92	100	13000	0.04	1100
HQ0603Q1N4□T01	1.4	20	500	42	55	89	95	103	12000	0.04	1100
HQ0603Q1N5□T01	1.5	20	500	42	54	86	90	100	12000	0.05	1000
HQ0603Q1N6□T01	1.6	20	500	41	52	80	83	92	10000	0.05	1000
HQ0603Q1N8□T01	1.8	20	500	38	45	72	75	81	10000	0.05	800
HQ0603Q2N0□T01	2.0	20	500	36	45	68	70	77	9000	0.12	600
HQ0603Q2N2□T01	2.2	20	500	36	45	67	69	76	9000	0.12	600
HQ0603Q2N4□T01	2.4	20	500	39	48	72	75	82	9000	0.12	600
HQ0603Q2N7□T01	2.7	20	500	36	44	65	68	73	9000	0.12	600
HQ0603Q3N0□T01	3.0	20	500	36	44	65	66	72	8000	0.12	600
HQ0603Q3N3□T01	3.3	20	500	34	45	73	77	89	7000	0.17	500
HQ0603Q3N6□T01	3.6	20	500	32	42	59	61	65	7000	0.17	500
HQ0603Q3N9□T01	3.9	20	500	30	39	61	64	72	7000	0.19	500
HQ0603Q4N3□T01	4.3	20	500	32	40	58	59	64	7000	0.19	500
HQ0603Q4N7□T01	4.7	20	500	31	39	58	58	63	7000	0.27	400
HQ0603Q5N1□T01	5.1	20	500	32	39	55	56	59	5500	0.27	400
HQ0603Q5N6□T01	5.6	20	500	32	40	56	57	57	5500	0.27	400
HQ0603Q6N2□T01	6.2	20	500	29	36	51	52	55	5500	0.27	400
HQ0603Q6N8□T01	6.8	20	500	29	36	50	51	53	5500	0.3	400
HQ0603Q7N5□T01	7.5	20	500	28	36	50	52	53	4500	0.32	400
HQ0603Q8N2□T01	8.2	20	500	29	37	51	51	52	4500	0.45	300
HQ0603Q9N1□T01	9.1	20	500	27	35	48	50	51	4500	0.45	300
HQ0603Q10N□T01	10	20	500	28	36	48	49	47	4500	0.45	300
HQ0603Q12N□T01	12	20	500	29	36	48	49	48	4000	0.55	300



Specifications subject to change without notice. Please check our website for latest information. Revised 2018/04/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

SPECIFICATIONS

HQ0603Q Series

Part Number	Inductance	Min. Quality Factor	L, Q Test Freq.	Typical Q @ Freq. (GHz)					Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
				0.5	0.8	1.8	2.0	2.4			
Units	nH	-	MHz	-					MHz	Ω	mA
Symbol	L	Q	Freq.	Q					S.R.F	DCR	I _r
HQ0603Q15N□T01	15	20	500	27	34	41	40	37	3500	0.75	300
HQ0603Q18N□T01	18	20	500	28	35	41	39	35	3500	0.9	250
HQ0603Q22N□T01	22	20	500	25	31	35	33	29	3000	0.95	250
HQ0603Q24N□T01	24	15	500	27	32	32	29	22	2000	1.8	170
HQ0603Q27N□T01	27	15	500	25	30	29	25	17	2000	1.8	170
HQ0603Q30N□T01	30	12	500	27	31	26	21	11	1700	2.2	150
HQ0603Q33N□T01	33	12	300	26	31	23	19	8	1700	2.2	150
HQ0603Q36N□T01	36	12	300	24	28	20	13	-	1500	2.3	150
HQ0603Q39N□T01	39	12	300	25	29	17	11	-	1500	2.3	150
HQ0603Q43N□T01	43	12	300	25	28	15	10	2	1300	2.5	130
HQ0603Q47N□T01	47	12	300	25	28	14	7	3	1300	2.5	130
HQ0603Q56N□T01	56	12	300	24	26	8	2	10	1200	2.7	130


※ □: Please specify the inductance tolerance. For $L \leq 4.2\text{nH}$, choose $B = \pm 0.1\text{nH}$, $C = \pm 0.2\text{nH}$ or $S = \pm 0.3\text{nH}$; For $4.2\text{nH} < L < 5.6\text{nH}$, choose, $H = \pm 3\%$, $J = \pm 5\%$ or $S = \pm 0.3\text{nH}$; For $L \geq 5.6\text{nH}$, choose, $H = \pm 3\%$, $J = \pm 5\%$.

※: Please refer to "Measurement Notice For RF Inductors".


TYPICAL ELECTRICAL CHARACTERISTICS

HQ0402Q Series

Inductance vs. Frequency Characteristics

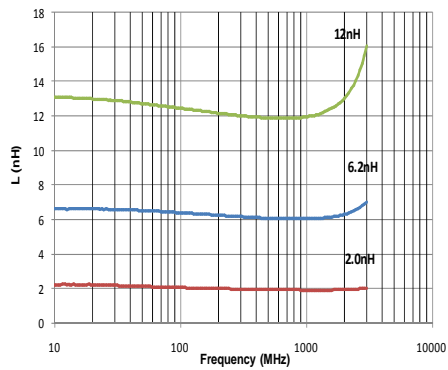


Q vs. Frequency Characteristics

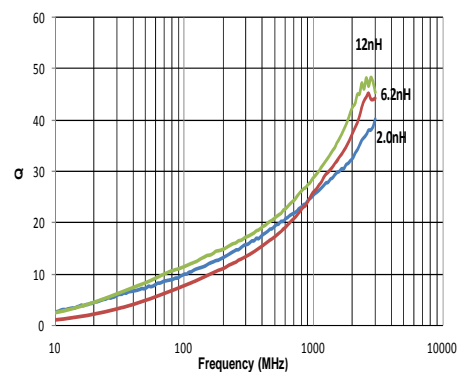

HQ0603Q Series

Inductance vs. Frequency Characteristics

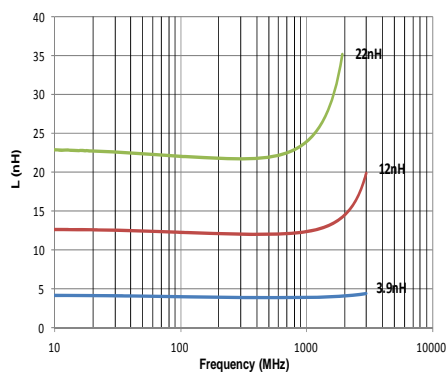

Q vs. Frequency Characteristics

