

## QAM0-85-U

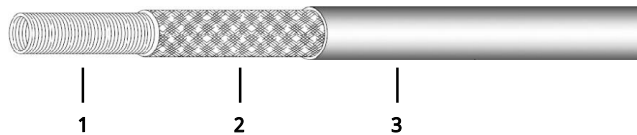
### Long Flex Life

**Features:**

- \* Long Flex Life
- \* High Durable

**Applications:**

- \* Laboratory Test
- \* Satellite Communication

**Construction**


| No. | Name            | Size (mm) | Material             |
|-----|-----------------|-----------|----------------------|
| 1   | Spring          | 10.9±0.1  | Stainless Steel Wire |
| 2   | Outer Conductor | 11.5±0.1  | Tin Plated Braid     |
| 3   | Jacket          | 14.2±0.15 | PUR                  |

**Environmental**

|              |           |
|--------------|-----------|
| Temperature: | -40~+80°C |
| Water Proof: | Yes       |
| Oil Proof:   | Yes       |

**Mechanical**

|                             |           |
|-----------------------------|-----------|
| Bend Radius (installation): | 60mm      |
| Bend Radius (repeated):     | 150mm     |
| Spring Spiral Direction:    | Right     |
| Spring Zero Load Pitch:     | 2.0mm     |
| Spring Wire Diameter:       | 1.2±0.1mm |
| Spring Inner Diameter:      | 8.5±0.1mm |
| Outer Conductor Coverage    | 90% min.  |
| Rate:                       |           |
| Inner Jacket Color:         | Black     |

**How To Order**
**QAM0-85-U-X**

X: Length in meters

**Examples:**

To order a QAM0-85-U RF cable armor, 0.5 meter, specify QAM0-85-U-0.5.