


# QAAS

## SSMA to SMA

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

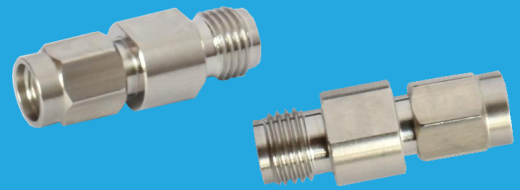

### Electrical

Frequency:	DC~26.5GHz
VSWR:	1.3 max.
Insertion Loss:	0.3dB max.
Impedance:	50Ω


### Mechanical

RF Connectors:	SSMA SMA
Mating Life Cycle:	2000 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PEI
Inner Conductor:	Gold Plated Beryllium Copper

### Environmental

Temperature:	-55~+85°C
--------------	-----------

### Outline Drawings

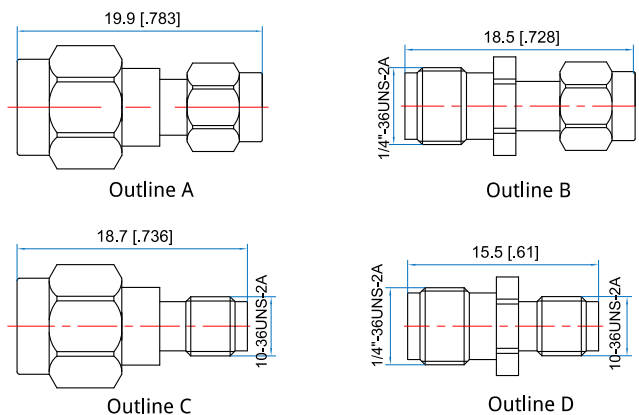

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QAAS-MM** - SSMA(m) to SMA(m), Outline A

**QAAS-MF** - SSMA(m) to SMA(f), Outline B

**QAAS-FM** - SSMA(f) to SMA(m), Outline C

**QAAS-FF** - SSMA(f) to SMA(f), Outline D

Customization is available upon request.