

QAEE

SC to SC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC-6GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: SC
Mating Life Cycle: 500 cycles
Outer Conductor: Nickel Plated Brass or SUS303
Stainless Steel
Dielectric: PTFE
Inner Conductor: Gold Plated Tin-phosphor
Bronze

Environmental

Temperature: -55~+85°C

Outline Drawings

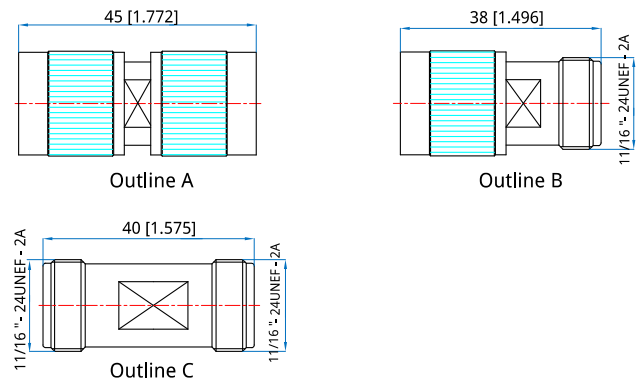

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QAEE-MM - SC(m) to SC(m), Outline A

QAEE-MF - SC(m) to SC(f), Outline B

QAEE-FF - SC(f) to SC(f), Outline C

Customization is available upon request.