

QDB-10-50000

10MHz~50GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range: 0.01~50GHz
 Insertion Loss: 0.8dB max.
 VSWR: 1.3 max.
 Impedance: 50Ω
 Voltage: 50V max.


Mechanical

Connectors: 2.4mm
 Mating Life Cycle: 500 cycles
 Outer Conductors: Passivated SUS303 Stainless Steel
 Dielectric: PEI
 Inner Conductors: Gold Plated Beryllium Copper

Environmental

Operating Temperature: -55~+165°C

Outline Drawings

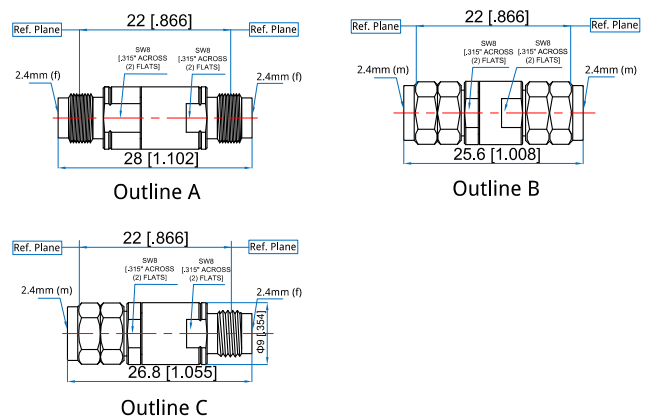

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

- [QDB-10-50000-2F2F](#) - Outline A
- [QDB-10-50000-22](#) - Outline B
- [QDB-10-50000-22F](#) - Outline C

Customization is available upon request.