

QPD3-3400-3800-30-N

3-Way, 3.4~3.8GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	3.4~3.8GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.5dB
Phase Balance:	±5°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size ^{*1} :	68*78*20mm 2.677*3.07*0.787in
Weight:	300g
Connectors:	N Female
Mounting:	2-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

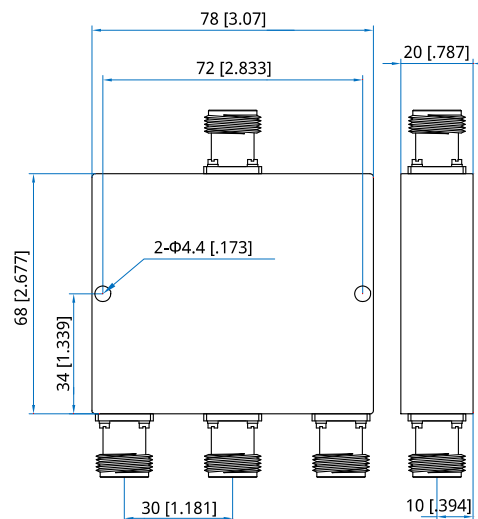

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD3-3400-3800-30-N

Customization is available upon request.