

QPD3-380-40000

3-Way, 0.38~40GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical


| | |
|--------------------|-------------|
| Frequency: | 0.38~40GHz |
| Insertion Loss: | 4.5dB max. |
| VSWR: | 1.7 max. |
| Isolation: | 17dB min. |
| Amplitude Balance: | ±0.9dB max. |
| Phase Balance: | ±10° max. |
| Average Power: | 20W max. |

Mechanical

| | |
|-------------|-----------------------------------|
| Size*1: | 254*40.6*12.7mm 10*1.598*0.5in |
| Connectors: | 2.92mm Female |
| Mounting: | 6-Φ2.6mm through-hole |

[1] Exclude connectors.

Outline Drawings

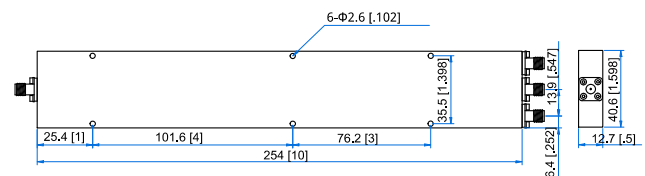

Unit: mm [in]

Tolerance: ±1mm [±0.039in]

How To Order

QPD3-380-40000

Customization is available upon request.