

QPD3-440-900-60-N

3-Way, 0.44~0.9GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.44~0.9GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±6°
Impedance:	50Ω
Average Power:	60W max. 6W max. as combiner

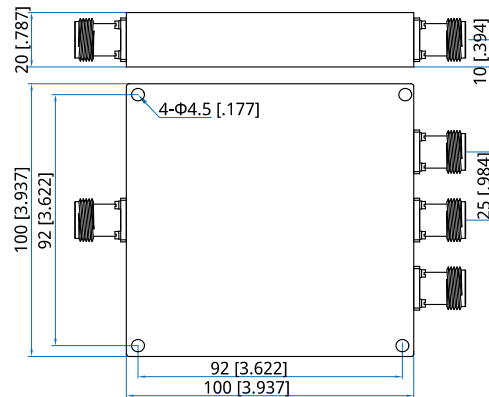
Mechanical

Size ^{*1} :	100*100*20mm 3.937*3.937*0.866in
Weight:	700g
Connectors:	N Female
Mounting:	4-Φ4.5mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD3-440-900-60-N

Customization is available upon request.