QWCA-112-S

WR-112 to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	6.57~9.9GHz
VSWR:	1.2 max.

Mechanical

RF Connectors:	SMA
Interface:	WR-112
Flange:	FDM84
Material:	Aluminium

How To Order

QWCA-112-X-Y

X: Connector type.
Y: End launch: E, Right angle: R.
E - End launch (Outline B)
R - Right angle (Outline A)

Connector naming rules:
S - S Male (Outline A, Outline B)
SF - S Female (Outline A, Outline B)

Examples:
To order a waveguide to coax adapter, WR-112 to SMA female, right angle, specify QWCA-112-SF-R.

Customization is available upon request.

Outline Drawings

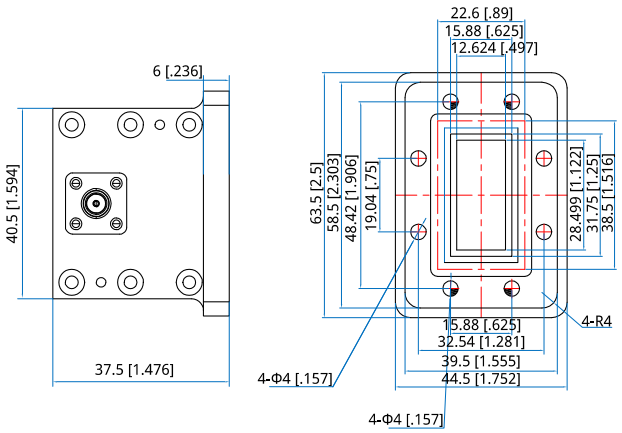

Outline A

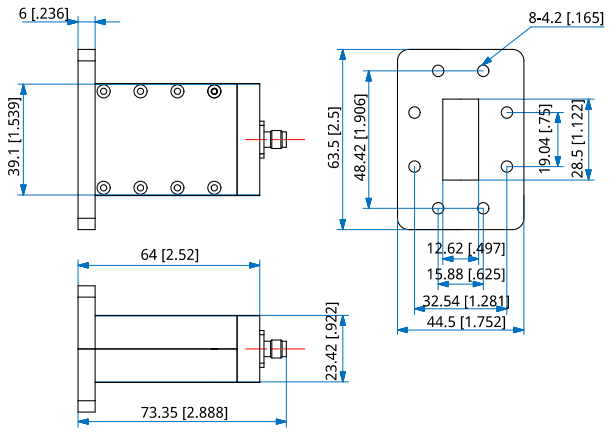

Outline B

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]