

QWCA-28-K

WR-28 to 2.92mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 26.3-40GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical

Coax Connectors: 2.92mm
Waveguide Size: WR-28
Flange: FBP320
Material: Aluminium

How To Order

QWCA-28-X-Y

X: Connector type.

Y: End launch: E, Right angle: R.

E - End launch

R - Right angle (Outline A)

Connector naming rules:

K - 2.92mm Male (Outline A)


KF - 2.92mm Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-28 to 2.92mm female, right angle, specify QWCA-28-KF-R.

Customization is available upon request.

Outline Drawings

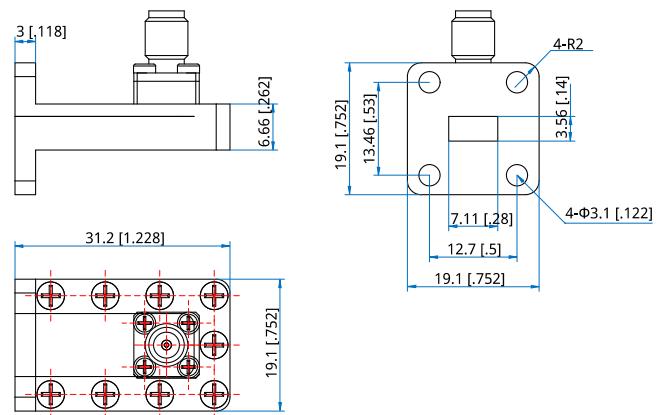

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]