

QWCA-510-N

WR-510 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 1.45~2.2GHz
VSWR: 1.2 max.

Mechanical

RF Connectors: N
Interface: WR-510
Flange: FDP18
Material: Aluminium

How To Order

QWCA-510-X-Y

X: Connector type.

Y: End launch: E, Right angle: R.

E - End launch

R - Right angle (Outline A)

Connector naming rules:

N - N Male (Outline A)


NF - N Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-510 to N female, right angle, specify QWCA-510-NF-R.

Customization is available upon request.

Outline Drawings

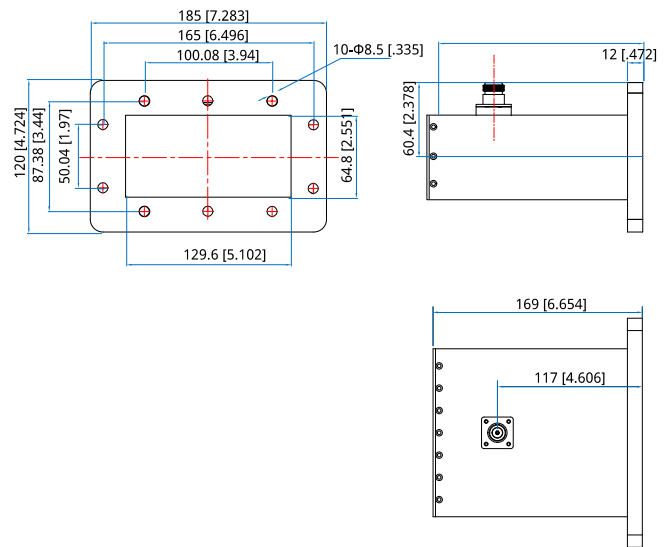

Outline A

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]