

QWCA-770-S

WR-770 to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 0.96~1.46GHz
VSWR: 1.2 max.

Mechanical

RF Connectors: SMA
Interface: WR-770
Flange: FDP12
Material: Aluminium

How To Order

QWCA-770-X-Y

X: Connector type.
Y: End launch: E, Right angle: R.
E - End launch
R - Right angle (Outline A)

Connector naming rules:


S - S Male (Outline A)
SF - S Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-770 to SMA female, right angle, specify QWCA-770-SF-R.

Customization is available upon request.

Outline Drawings

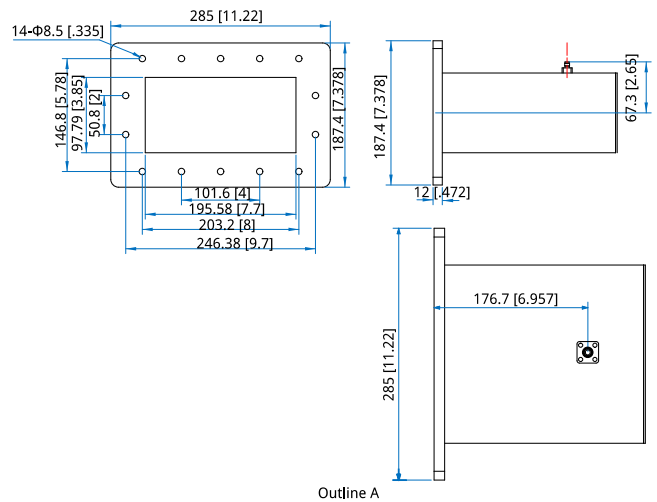

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]