

QWCA-90-N

WR-90 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 8.2~12.5GHz
VSWR: 1.2 max.

Mechanical

RF Connectors: N
Interface: WR-90
Flange: FDM100
Material: Aluminium

How To Order

QWCA-90-X-Y

X: Connector type.
Y: End launch: E, Right angle: R.
E - End launch
R - Right angle (Outline A)

Connector naming rules:


N - N Male (Outline A)
NF - N Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-90 to N female, right angle, specify QWCA-90-NF-R.

Customization is available upon request.

Outline Drawings

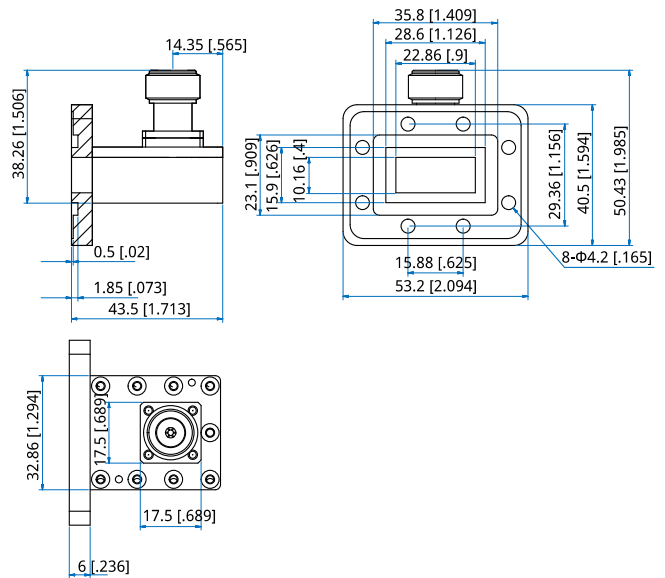

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]