

QWCA-975-N

WR-975 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 0.76~1.15GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical

RF Connectors: N
Interface: WR-975
Flange: FDP9
Material: Aluminium

Environmental

Temperature: -55~+125°C

How To Order

QWCA-975-X-Y

X: Connector type.

Y: End launch: E, Right angle: R.

E - End launch

R - Right angle (Outline A)

Connector naming rules:

N - N Male (Outline A)


NF - N Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-975 to N female, right angle, specify QWCA-975-NF-R.

Customization is available upon request.

Outline Drawings

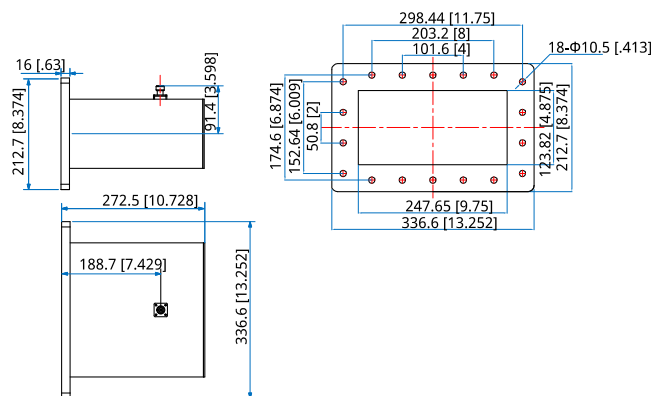

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]