

QWCA-D250-N

WRD-250 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 2.6~7.8GHz
VSWR: 1.4 max.
Insertion loss: 0.4dB max.

Mechanical

RF Connectors: N
Interface: WRD-250
Flange: FPWRD250
Material: Aluminium

How To Order

QWCA-D250-X-Y

X: Connector type.

Y: End launch: E, Right angle: R.

E - End launch

R - Right angle (Outline A)

Connector naming rules:

N - N Male (Outline A)


NF - N Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-D250 to N female, right angle, specify QWCA-D250-NF-R.

Customization is available upon request.

Outline Drawings

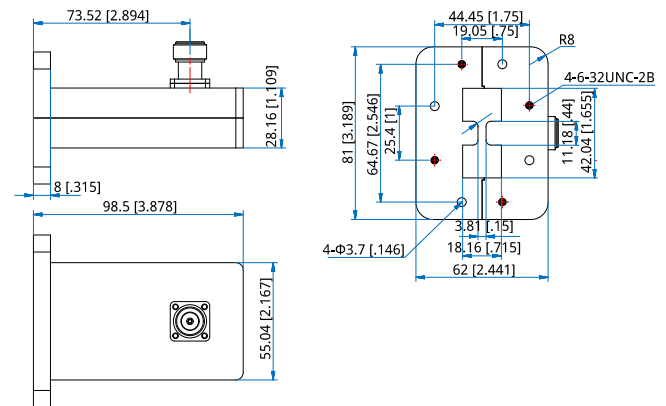

Outline A

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]