

# QWCA-D350-N

## WRD-350 to N

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 3.5~8.2GHz  
VSWR: 1.4 max.

### Mechanical

RF Connectors: N  
Interface: WRD-350  
Flange: FPWRD350  
Material: Aluminium

### How To Order

#### QWCA-D350-X-Y

X: Connector type.

Y: End launch: E, Right angle: R.

E - End launch

R - Right angle (Outline A)

Connector naming rules:

N - N Male (Outline A)


NF - N Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-D350 to N female, right angle, specify QWCA-D350-NF-R.

Customization is available upon request.

### Outline Drawings

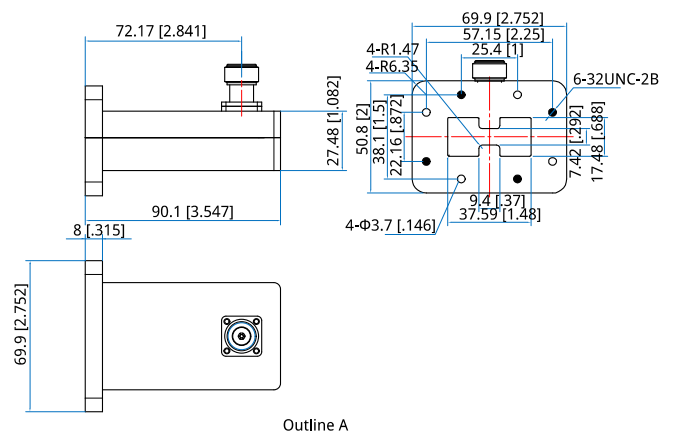

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]