

QWCA-D475-N

WRD-475 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 4.75~11GHz
VSWR: 1.2 max.

Mechanical

RF Connectors: N
Interface: WRD-475
Flange: FPWRD475D24
Material: Aluminium

How To Order

QWCA-D475-X-Y

X: Connector type.
Y: End launch: E, Right angle: R.
E - End launch
R - Right angle (Outline A)


Connector naming rules:
N - N Male (Outline A)
NF - N Female (Outline A)

Examples:

To order a waveguide to coax adapter, WR-D475 to N female, right angle, specify QWCA-D475-NF-R.

Customization is available upon request.

Outline Drawings

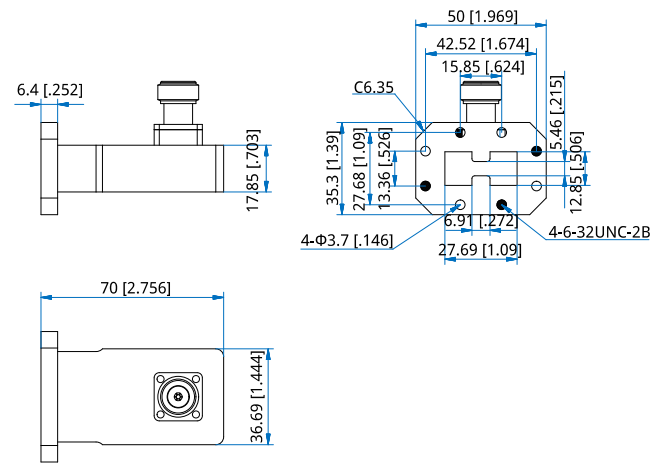

Outline A

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]