
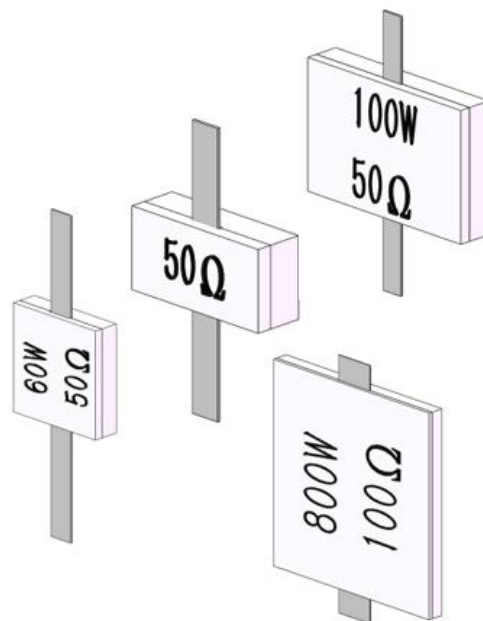


双引线贴片电阻 (Resistors Tab and Cover) 10W/20W/40W/60W/100W/150W/250W/400W/800W

主要技术指标 (General Specifications)

- 基片 (Material): 氧化铍 (BeO) 或氮化银 (AlN)
- 电阻材料 (Resistive Material): 厚膜 (Thick Film)
- 引线 (Tabs): 镀银铜 (Silver Plated Beryllium Copper)
- 盖板 (Cover): 氧化铝 (Al₂O₃)
- 阻值 (Resistance): 0.5Ω - 1MΩ

产品规格 (Product Reference)

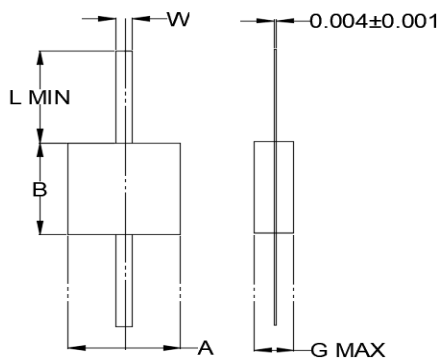

氧化铍型零件号 Beryllium Oxide Part Number	A(±0.010)	B(±0.010)	G(MAX)	L(MIN)	W(±0.050)	Power (w)
RPC5025	0.200 [5.08]	0.100 [2.54]	0.088 [2.24]	0.125 [3.18]	0.040 [1.02]	10/20
RPC6363	0.250 [6.35]	0.250 [6.35]	0.088 [2.24]	0.250 [6.35]	0.060 [1.52]	40/60
RPC9060	0.354 [9.00]	0.236 [6.00]	0.088 [2.24]	0.125 [3.18]	0.040 [1.02]	100/150
RPC9595	0.375 [9.53]	0.375 [9.53]	0.088 [2.24]	0.125 [3.18]	0.060 [1.52]	250
RPC127127	0.500 [12.7]	0.500 [12.7]	0.125 [3.18]	0.125 [3.18]	0.120 [3.05]	400
RPC254254	1.000 [25.4]	1.000 [25.4]	0.125 [3.18]	0.125 [3.18]	0.200 [5.08]	800


尺寸单位为英寸[毫米] (Dimensions are in inches[mm]) ; 公差为: .xxx=±0.010 .XX=±0.015

氮化铝型零件号 Aluminum Nitride Part Number	A(±0.010)	B(±0.010)	G(MAX)	L(MIN)	W(±0.050)	Power (w)
RPC5025N	0.200 [5.08]	0.100 [2.54]	0.088 [2.24]	0.125 [3.18]	0.040 [1.02]	10/20
RPC6363N	0.250 [6.35]	0.245 [6.22]	0.088 [2.24]	0.250 [6.35]	0.060 [1.52]	40/60
RPC9060N	0.354 [9.00]	0.236 [6.00]	0.088 [2.24]	0.125 [3.18]	0.040 [1.02]	100
RPC9595N	0.375 [9.53]	0.375 [9.53]	0.088 [2.24]	0.125 [3.18]	0.060 [1.52]	250
RPC127127N	0.500 [12.7]	0.500 [12.7]	0.125 [3.18]	0.125 [3.18]	0.120 [3.05]	400
RPC254254N	1.000 [25.4]	1.000 [25.4]	0.125 [3.18]	0.125 [3.18]	0.200 [5.08]	800

尺寸单位为英寸[毫米] (Dimensions are in inches[mm]) ; 公差为: .xxx=±0.010 .XX=±0.015

订货指南 (Ordering Information)

例 (Example): RPC 5025 N -10W -50 -5 T

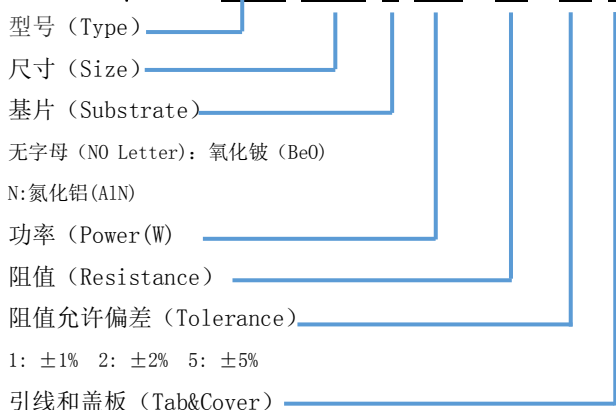

降功耗曲线 (Power Derating)

