
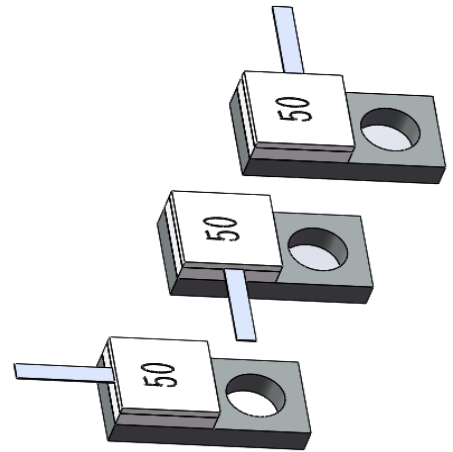


单引线单孔法兰负载 (Flanged Terminations 10W/20W/40W/60W)

主要技术指标 (General Specifications)

- 基片 (Substrate) : 氧化铍 (BeO)
- 电阻材料 (Resistive Material) : 厚膜 (Thick Film)
- 引线 (Tabs) : 镀银镀铜 (Silver Plated Beryllium Copper)
- 盖板 (Cover) : 氧化铝 (Al₂O₃)
- 法兰 (Flange) : 镀镍铜 (Nickel Plated Copper)
- 阻抗 (Impedance) : 50 Ω

产品规格 (Product Reference)

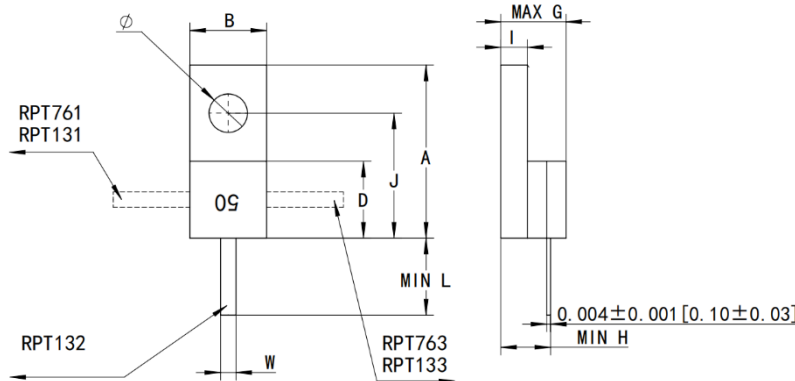

型号	功率	频率	驻波比	外形尺寸									
Part Number	Power (W)	Frequency (GHz)	VSWR (max)	Dimensions									
				A	B	D	G	H	I	J	L	W	Φ
RPT761	10/20	DC-6/12/18	1.25:1	0.300	0.200	0.100	0.150	0.106	0.062	0.200	0.125	0.040	0.116
				[7.62]	[5.08]	[2.54]	[3.81]	[2.67]	[1.57]	[5.08]	[3.18]	[1.02]	[2.95]
RPT763	10/20	DC-6/12/18	1.25:1	0.300	0.200	0.100	0.150	0.106	0.062	0.200	0.125	0.040	0.116
				[7.62]	[5.08]	[2.54]	[3.81]	[2.67]	[1.57]	[5.08]	[3.18]	[1.02]	[2.95]
RPT131	20/40/60	DC-5/6/8	1.25:1	0.515	0.250	0.250	0.15	0.105	0.062	0.390	0.250	0.060	0.116
				[13.08]	[6.35]	[6.35]	[3.81]	[2.67]	[1.57]	[9.90]	[6.35]	[1.52]	[2.95]
RPT132	20/40/60	DC-5/6/8	1.25:1	0.515	0.250	0.250	0.15	0.105	0.062	0.390	0.250	0.060	0.116
				[13.08]	[6.35]	[6.35]	[3.81]	[2.67]	[1.57]	[9.90]	[6.35]	[1.52]	[2.95]
RPT133	20/40/60	DC-5/6/8	1.25:1	0.515	0.250	0.250	0.15	0.105	0.062	0.390	0.250	0.060	0.116
				[13.08]	[6.35]	[6.35]	[3.81]	[2.67]	[1.57]	[9.90]	[6.35]	[1.52]	[2.95]

尺寸单位为英寸[毫米] (Dimensions are in inches[mm]) ; 公差为: .xxx=±0.010 .XX=±0.015

订货指南 (Ordering Information)

例 (Example) : RPT 761 N-10W-50-5 G

- 型号 (Type) : RPT 761
- 尺寸 (Size) : N
- 基片 (Substrate) : 无字母 (NO Letter) : 氧化铍 (BeO)
- N : 氮化铝 (AlN)
- 功率 (Power (W)) : 10W
- 阻值 (Resistance) : 50 Ω
- 阻值允许偏差 (Tolerance) : 5 : ±5%
- 1 : ±1% 2 : ±2% 5 : ±5%
- 电镀 (Tab Plating) : G
- 无字母 (No Letter) : 镀银 (Silver Plated Tab) G : 镀金 (Gold Plated Tab)

降功耗曲线 (Power Derating)

