



# 单引线四孔法兰负载 ( Flanged Terminations 800W/1000W)

## 主要技术指标 (General Specifications)

- 基片 (Substrate) : 氧化铍 (BeO)
- 电阻材料 ( Resistive Material) : 厚膜 (Thick Film)
- 引线 (Tabs) : 镀银镀铜 (Silver Plated Beryllium Copper)
- 盖板 (Cover) : 氧化铝 (Al<sub>2</sub>O<sub>3</sub>)
- 法兰 (Flange) : 镀镍铜 (Nickel Plated Copper)
- 阻抗 (Impedance) : 50 Ω

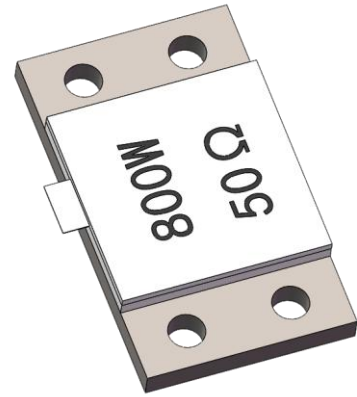

## 产品规格 (Product Reference)

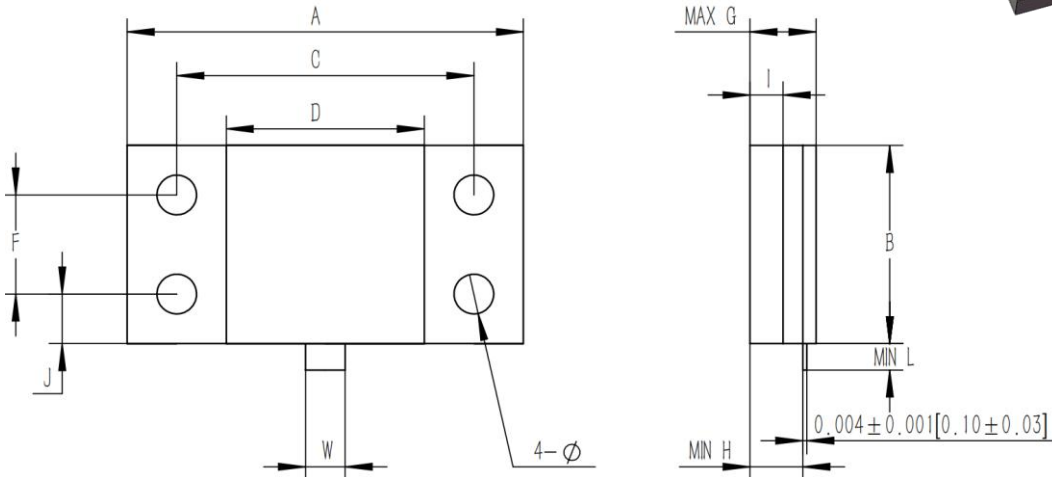


型号	功率	频率	驻波比	外形尺寸											
Part Number	Power (W)	Frequency (GHz)	VSWR	Dimensions											
			(max)	A	B	C	D	F	G	H	I	J	L	W	Φ
RPT483-***W-50-5	800/1000	DC-1.0GHz	1.25:1	1.90	1.00	1.55	1.00	0.500	0.230	0.188	0.125	0.250	0.125	0.25	0.170
				[48.26]	[25.40]	[39.37]	[25.40]	[12.70]	[5.84]	[4.78]	[3.18]	[6.35]	[3.18]	[6.35]	[4.32]

尺寸单位为英寸[毫米] (Dimensions are in inches[mm]) ; 公差为: .xxx=±0.010 .XX=±0.015

## 订货指南 (Ordering Information)

例 (Example) :

**RPT 483 N-800W-50-5 G**

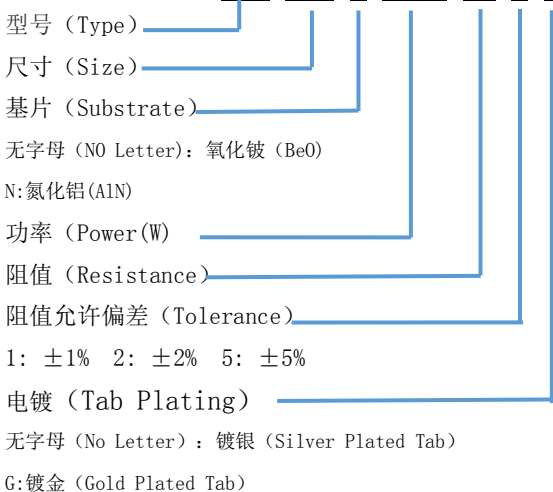

## 降功耗曲线 (Power Derating)

